

Anybus[®]

BY HMS NETWORKS



Anybus Defender Compact
Quick start-up guide



Contents

1	Safety instructions	3
2	Maintenance	3
3	Using Open Source Software	4
3.1	General Information	4
3.2	Special Liability Regulations	5
3.3	Used Open-Source Software	5
4	Brief description	6
5	Performance characteristics	6
6	Include in delivery	7
7	Displays, controls and connections	8
8	Getting started	10
9	Using the Anybus Defender Compact in bridge mode	12
10	Using the Anybus Defender Compact in gateway mode	13
11	Configuration of the Anybus Defender Compact	14
12	Factory settings on delivery	14
13	Load factory settings (Factory Reset)	14
14	Technical data	15
15	Technical support	15
16	Disposal	16

This document is valid for the device Anybus Defender Compact; Item No.: ABD1004-NATFW in hardware version from HW 03.

This Quick Start Guide provides a quick overview of selected operating procedures and functions of the industrial firewall Anybus Defender Compact. However, the detailed manual with the important Notes and safety instructions can NOT be replaced by this document.

Read the following instructions carefully and keep them in a safe. Latest information, updates and the complete Manual, visit our website at www.hms-networks.com.

1 Safety instructions

- Only qualified specialist personnel may install, start up, and operate the router. The national safety and accident prevention regulations must be observed.
- The device is built to the latest technological standards and recognized safety standards (see Declaration of Conformity).
- The device is only intended for operation in the control cabinet and with SELV according to IEC 60950/EN 60950/VDE 0805.
- The router may only be connected to devices, which meet the requirements of EN 60950.
- The router is for indoor use only.
- Never open the router chassis. Unauthorized opening and improper repair can pose a danger to the user. Unauthorized modifications are not covered by the manufacturer's warranty.

Opening up the device voids the warranty!



NOTE: Electrostatic Discharge!

Observe the necessary safety precautions when handling components that are vulnerable to electrostatic discharge (EN 61340-5-1 and IEC 61340-5-1)!

2 Maintenance

The Anybus Defender Compact Industrial Firewalls are maintenance-free units. If an Anybus Defender Compact have damage or malfunction, the device must be immediately taken out of service and secured against unintentional operation.

NOTICE

Regardless of the maintenance-free hardware, there is a need for action in terms of IT security.

- Keep the software / firmware up to date.
- Keep yourself informed about security updates of the product.

Information on this can be found at www.hms-networks.com

3 Using Open Source Software

3.1 General Information

Our products contain, amongst others, so-called open-source software that is provided by third parties and has been published for free public use. The open-source software is subject to special open-source software licenses and the copyright of third parties. Basically, each customer can use the open-source software freely in compliance with the licensing terms of the respective producers. The rights of the customer to use the open-source software beyond the purpose of our products are regulated in detail by the respective concerned open-source software licenses. The customer use the open-source software freely, as provided in the respective effective license, beyond the purpose that the open-source software gets in our products. In case there is a contradiction between the licensing terms for one of our products and the respective open-source software license, the respective relevant open-source software license takes priority over our licensing terms, as far as the respective open-source software is concerned by this.

The use of the used open-source software is possible free of charge. We do not demand usage fees or any comparable fees for the use of the open-source software contained in our products. The use of the open-source software in our products by the customer is not part of the earnings we achieve with the contractual compensation.

All open-source software programs contained in our products can be taken from the available list. The most important open-source software licenses are listed in the Licenses section at the end of this publication.

As far as programs contained in our products are subject to the GNU General Public License (GPL), GNU Lesser General Public License (LGPL), the Berkeley Software Distribution (BSD), the Massachusetts Institute of Technology (MIT) or another open-source software license, which regulates that the source code must be made available, and if this software is not already delivered in source code on a data carrier with our product, we will send you this at any time upon request. If it is required to send this on a data carrier, the sending will be made against payment of a cost compensation of € 35,00. Our offer to send the source code upon request ceases automatically three years after delivery of our product to the customer.

Requests must be directed to the following address, if possible under specification of the serial number:

HMS Networks AB
Stationsgatan 37, Box 4126
300 04 Halmstad
SWEDEN

Tel. +46 35 17 29 56
sales@hms.se

3.2 Special Liability Regulations


We do not assume any warranty or liability, if the open-source software programs contained in our product are used by the customer in a manner that does not comply any more with the purpose of the contract, which is the basis of the acquisition of our product. This concerns in particular any use of the open-source software programs outside of our product. The warranty and liability regulations that are provided by the respective effective open-source software license for the respective open-source software as listed in the following are effective for the use of the open-source software beyond the purpose of the contract. In particular, we are not liable, if the open-source software in our product or the complete software configuration in our product is changed. The warranty granted with the contract, which is the basis of the acquisition of our product, is only effective for the unchanged open-source software and the unchanged software configuration in our product.

3.3 Used Open-Source Software

For a list of the open-source software used in this product see www.hms-networks.com

4 Brief description

The **Anybus Defender Compact** is a „self-learning“ easy-to-configure industrial firewall. It can be used in both bridge mode and gateway mode.

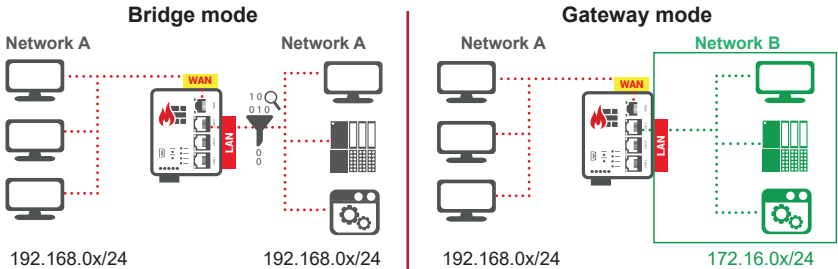

The configuration is made via the USB interface using the software **Anybus Defender Compact Manager** (not included in delivery).


The software can be downloaded for free at <https://www.hms-networks.com/downloads>

5 Performance characteristics

- Protects the machines in the network from attacks from the Internet.
- Easy network segmentation with controlled routing and NAT.
- Convenient learning mode makes creation of filter tables simple & easy.
- Integration into existing networks.
- Bridge or Gateway mode.
- IP, port, and protocol filters to monitor and restrict traffic.
- Configuration with secure software.
- Less attack vectors by avoiding a web interface.
- Versatile NAT functionalities, eg 1:1 NAT, SimpleNAT and port forwarding.

6 Include in delivery

Please check that your delivery is complete:



1 x Anybus Defender Compact; ABD1004-NATFW



1 x Plug-in bridge



1 x cabel USB A - USB-mini B



1 x Quick start-up guide

Should any of these parts are missing or damaged, please contact the following address:

HMS Networks AB
Stationsgatan 37, Box 4126
300 04 Halmstad
SWEDEN

Tel.: +46 35 17 29 56
www.hms-networks.com

Please keep the original box and the original packaging in case you need to send the device for repair at a later date.


7 Displays, controls and connections

1 x WAN interface

3 x LAN interface

1 x USB slave 2.0 mini

–	0V DC connection
+	Power source connection 10 - 30 V DC
FE	Functional earth
I/O 1*	Digital input (10-30 V DC) (Low 0 – 3,2 V DC, High 8 – 30 V DC)
I/O 2	Digital input (10-30V DC) (Low 0 – 3,2 V DC, High 8 – 30 V DC) - Function in preparation -

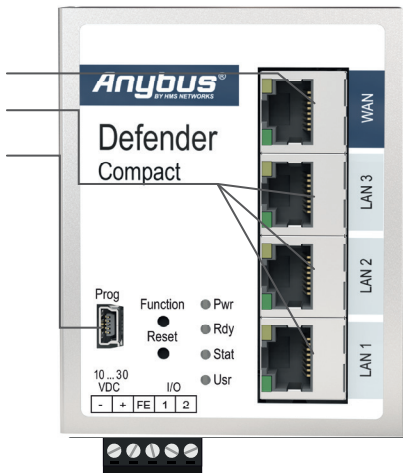

* Input 1 can be used during initial startup to activate the Bridge mode with the packet filter switched off. The input is only evaluated until the **Anybus Defender Compact** has been configured once, then the state of input 1 is ignored.

Designation	Status	Description
Prog (Programming)	–	USB interface mini-B for connecting to the configuration PC.
Function	–	Button - function in preparation.
Reset	–	Button - performing a device restart (cold start).

Designation	Status	Description
Pwr (Power)	LED off	Device power source is switched off or device is not connected to power source / power pack.
	LED on	Power source is connected to terminal block and switched on.
Rdy (Ready)	LED flashing	After the system has been checked and started, the LED flashes for the duration of the starting up process.
	LED on	The device is ready for operation.
Stat (Status)	LED on	The packet filter is active in both directions (WAN > LAN, LAN > WAN).
	LED off	The packet filter is INACTIVE in both directions (WAN > LAN, LAN > WAN).
	LED flashing	The packet filter is INACTIVE in at least one direction (WAN > LAN, LAN > WAN).
Usr (User)	LED on	The device is not configured.
	LED off	The device was configured by the software Anybus Defender Compact Manager.
WAN	-	WAN connection (customer network, DSL router).
WAN LED	orange LED flashing	Network data transfer active.
	green LED on	Transfer rate = 100 MBit/s
	green LED off	Transfer rate = 10 MBit/s
LAN 1 – 3	-	LAN connection (machine network).
LAN LED 1 – 3	orange LED flashing	Network data transfer active.
	green LED on	Transfer rate = 100 MBit/s
	green LED off	Transfer rate = 10 MBit/s

8 Getting started

Before connecting the device to a network or PC, first ensure that it is properly connected to a power supply, otherwise it may cause damage to other equipment.

The Anybus Defender Compact can be operated in two modes (see chapter 4).

During the initial commissioning and after each factory reset, the Anybus Defender Compact is always set in Bridge mode, with active packet filter in both directions (Security By Default).

The packet filter can be switched INACTIVE by means of activating input 1 (High 8 – 30 V DC).

You should choose this preference on input 1 if any of these apply to you:

If you want to operate the Anybus Defender Compact as a bridge

and want to make the configuration at a later time

and want to do the installation now

and do not want to influence the existing network

OR


Activate the learning function of the Anybus Defender Compact in order to be able to read the learned network traffic later during the configuration.

a. Bridge mode:

After booting, the packet filter is INACTIVE.

That is, the WAN > LAN and LAN > WAN transitions are open. All pending connection attempts / connections are detected.

This mode is only active until the device has been configured for the first time.



1. Connect equipotential bonding to the functional earth (FE).
2. Connect the terminals I/O 1 and + (=> I1 = high). To do this, use the supplied Plug-in bridge.
3. Connect the device to a power supply (DC 10 – 30 V).


Make sure the polarity is correct!

NOTICE

Input 1 is only evaluated until the *Anybus Defender Compact* has been configured once, then the state of input 1 is ignored.

- b. **Bridge mode with active packet filter** (Security by default):
After booting, both the packet filter and the learning mode are active.

That is, the WAN > LAN and LAN > WAN transitions are blocked.
All pending connection attempts are detected.



1. Connect equipotential bonding to the functional earth (**FE**).
2. Connect the device to a power supply (**DC 10 – 30 V**).

Make sure the polarity is correct!

After switching on the power supply the LED Pwr lights up.



As soon as the system has been checked and starts, the LED Rdy flashes for the duration of the boot process (about 90 seconds).




If the **Anybus Defender Compact** is ready, the LED Pwr + Rdy will light up.




Light code in bridge mode - packet filter active -

LED Stat on => the firewall is active
LED Usr on => the device has not yet been configured.




Light code in bridge mode - packet filter INACTIVE -

LED Stat flashes => the packet filter is inactive
LED Usr on => the device has not yet been configured.



9 Using the Anybus Defender Compact in bridge mode

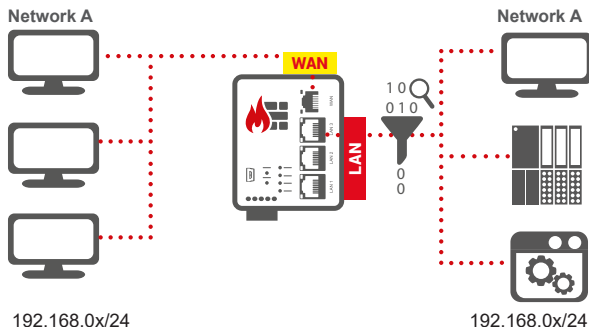


If you use the Anybus Defender Compact in bridge mode and install it unconfigured in your network environment, start the device in **bridge mode with packet filter INACTIVE** (input 1 = HIGH).

After booting, the packet filter is inactive and the learning mode is active.
That is, the WAN > LAN and LAN > WAN transitions are open.
All pending connection attempts / connections are detected.

Input 1 is only evaluated until the Anybus Defender Compact has been configured once, then the state of input 1 is ignored.

Use bridge mode if your network is on the LAN and WAN side of Anybus Defender Compact in the same network segment (see graphic above for example IP addresses).

10 Using the Anybus Defender Compact in gateway mode

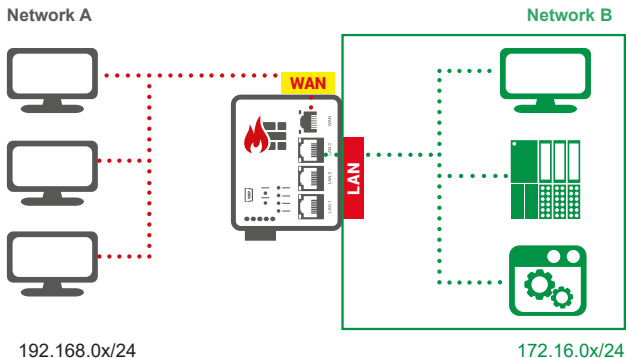

If you use the Anybus Defender Compact in gateway mode, start the device in Bridge mode with active packet filter.

After booting, both the packet filter and the learning mode are active.
That is, the WAN > LAN and LAN > WAN transitions are blocked.
All pending connection attempts are detected.

Use gateway mode if your network is on the LAN and WAN side of the Anybus Defender Compact in different network segments (see graphic above with the IP example addresses).

11 Configuration of the Anybus Defender Compact

The configuration of the firewall is made via the USB interface using the software **Anybus Defender Compact Manager** (not included in delivery).

In addition to a convenient graphical user interface (GUI) and public-key authentication, the „**Anybus Defender Compact Manager**“ offers all the functions that an automation engineer knows from his PLC programming environment (eg export, import, duplicate, online comparison, online functions, etc.).

Download the configuration software „Anybus Defender Compact Manager“ **for free** under the following address: <https://www.hms-networks.com/downloads>

After the installation, you can configure the Anybus Defender Compact for the respective purpose using

12 Factory settings on delivery

Default settings **Anybus Defender Compact**:

IP address (USB port): 169.254.0.1

Subnet Mask: 255.255.0.0

User 1: admin

User 2: factoryreset

Password: *The device password is located on the back of the device and applies to both User 1 and User 2.*

13 Load factory settings (Factory Reset)

- Open a project in the Anybus Defender Compact Manager with the user „**factoryreset**“.
- Connect to the Anybus Defender Compact („**Go online**“).
- In the „**Device**“ menu select the menu item „**Factoryreset**“.
- Close the project and log in again with the user „**admin**“.

The Anybus Defender Compact will now be reset to its original factory settings and must be reconfigured.

14 Technical data

Voltage V (DC)	10 - 30 V DC (SELV and Limited Energy circuit)
Power consumption	max. 250 mA @ 24 V
Operating temperature	-40 – 75 °C
Dimensions	69 mm x 33,5 mm x 92,5 mm (W x D x H)
Mounting	DIN rail mounting (based on DIN EN 50022)

Extract from the technical data sheet.

Find the complete technical data in our download portal at www.hms-networks.com.

15 Technical support

For technical support (FAQ, troubleshooting, most recent information, etc.) see our website

<https://www.hms-networks.com/technical-support/?productId=ABD1004-NATFW>

Still need help?

For support enquiries, always give the serial number of your **Anybus Defender Compact**

and open a case at <https://support.hms-networks.com>

16 Disposal

This product must be disposed of in accordance with the WEEE Directive.

Please do not discard electronic devices with household waste. Instead, dispose of the product at designated electronic waste collection points, following local regulations. Proper disposal helps prevent environmental harm and supports recycling efforts.

For more information, contact your local waste management authorities or your local HMS office.

Old batteries and accumulators that are not enclosed by the old device, as well as lamps that can be removed from the old device without destroying them, must be separated from the old device in a non-destructive manner before they are handed over to a collection point.

The final holder is responsible for deleting personal data on the old devices to be disposed of.

Do not dispose of old devices into household waste!



Only for EU countries:

Dispose of the device in accordance with the Waste Electrical and Electronic Equipment Directive 2012/19/EU - WEEE.

Simplified CE Declaration of Conformity

Hereby, **HMS Networks AB** acknowledges that the device **Anybus Defender Compact** is in compliance with the essential requirements and other relevant provisions of directive 2014/30/EU.

The declaration of conformity can be found at: **www.hms-networks.com**.

HMS Networks AB

Stationsgatan 37, Box 4126
300 04 Halmstad
SWEDEN

Tel.: +46 35 17 29 56
sales@hms.se
www.hms-networks.com

